




Double Column Machining Center

BM

1530M • 2035M • 2740M

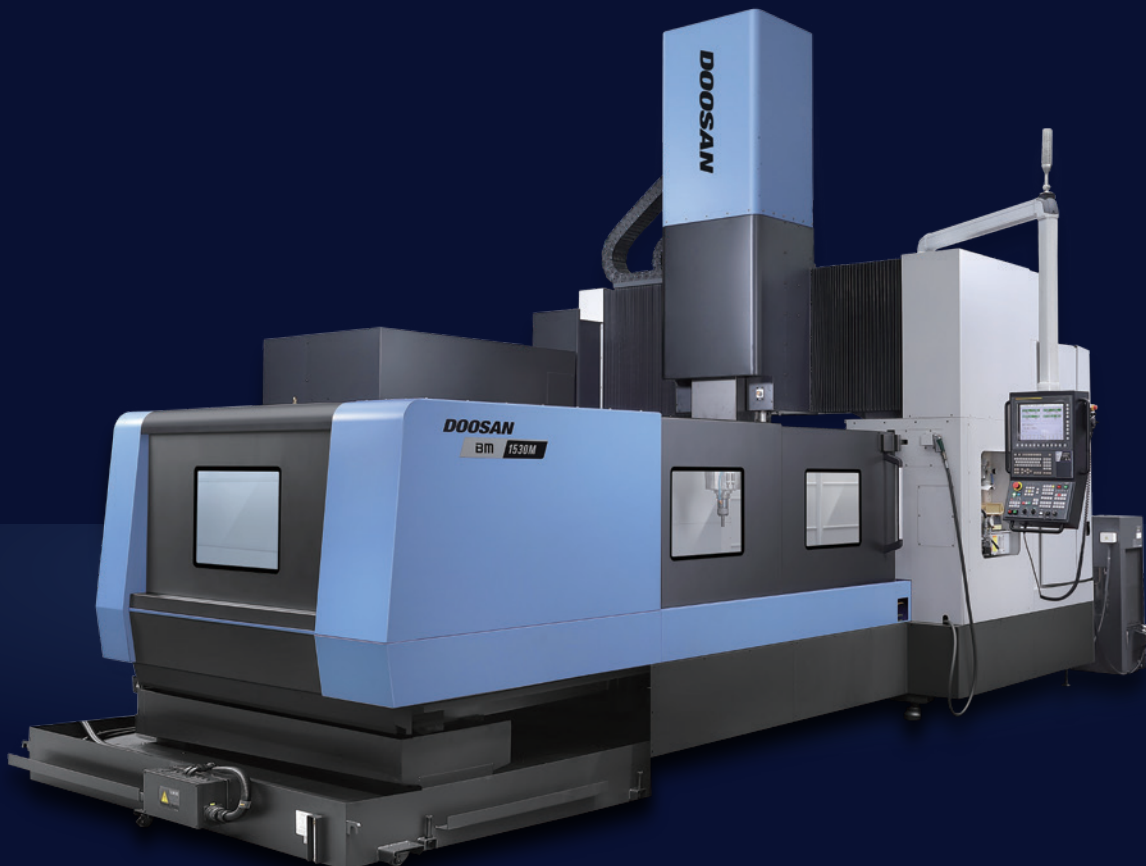

Doosan Machine Tools

Basic Information

Basic Structure
Cutting
Performance

Detailed
Information

Options
Optimized Tool
Processing Solution
Capacity Diagram
Specifications



BM series

The BM Series is a large double-column type machining center designed to process molds. Equipped with a low-vibration built-in spindle, the machining center is suitable for a variety of works from roughing to finishing. The new improved design delivers greater efficiency, thereby raising customers' productivity and creating maximum added value.

Contents

02 Product Overview

Basic Information

04 Basic Structure

07 Cutting Performance

Detailed Information

08 Standard / Optional Specifications

10 Optimized Tool Processing Solution

12 Capacity Diagram

14 Machine / NC Unit Specifications

Equipped with a high-speed, high-rigidity spindle as a standard feature

- 12000 r/min high-speed spindle
- Long-nose type ideal for deep pocket mold cutting
- Equipped with a dual contact spindle as a standard feature for high rigidity and minimum vibration




Standard feed axes equipment for higher level of precision

- All axes provided with a linear scale as a standard feature
- Ball screw bearings and nut cooling system



Adoption of structure and control solution for high-quality mold cutting

- Covers provided to minimize the impact of ambient temperature
- Thermal displacement compensation for spindle and structure included as a standard feature

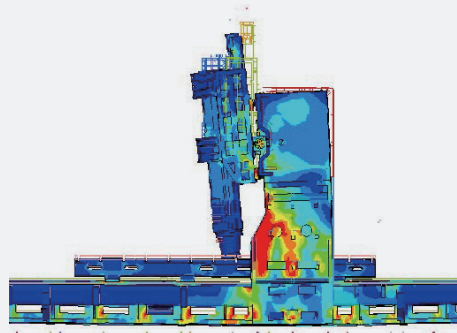

Sample work



Press mold



Injection mold



Refrigerator mold




Automotive mold

Basic Structure


Double-column structure for stable precision level

Thermal Displacement Compensation for Spindle and Structure Included as a Standard Feature

Multiple thermal sensors are attached to minimize and compensate thermal displacement of the spindle and the structure.

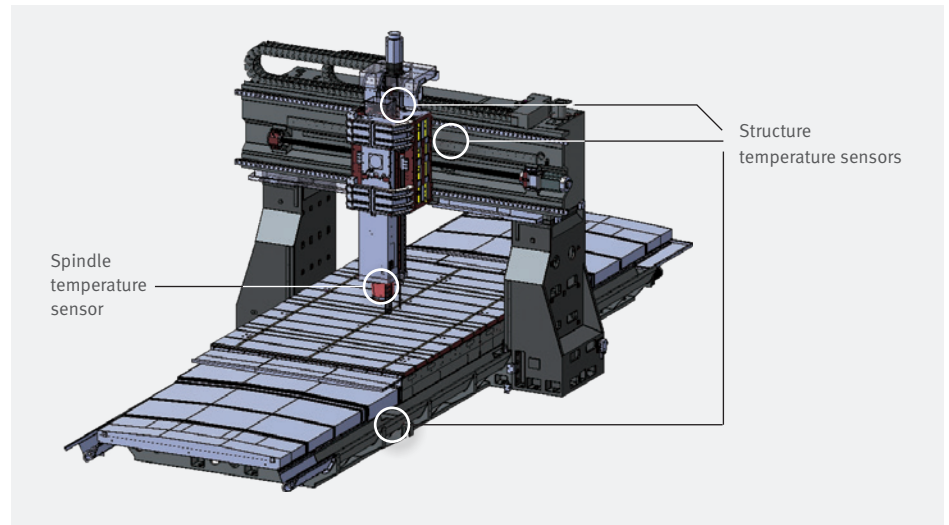

Important parts of the structure are covered to minimize the impact of ambient temperature

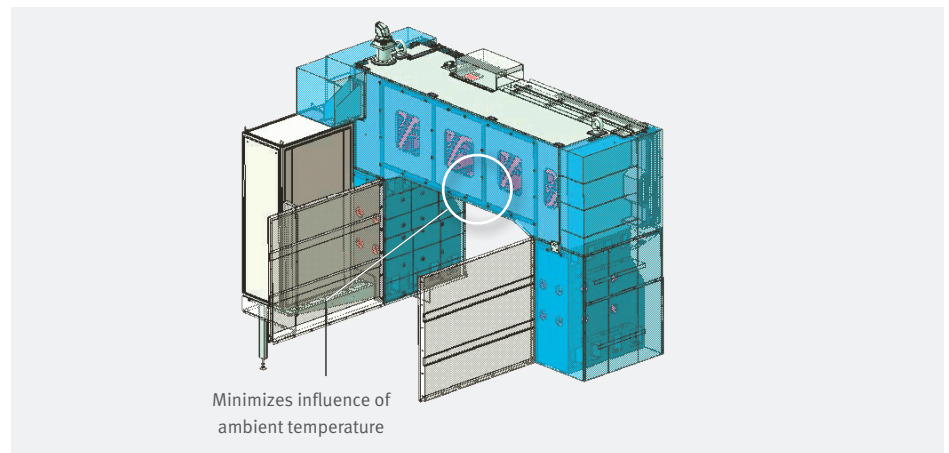


Foundation

Anchoring is recommended to ensure machining accuracy over a long time.

Machine Foundation*

Since machining accuracy is highly dependent on the machine's foundation, anchoring is recommended to maintain accuracy over a long period of time. The anchor bolts and other related parts for foundation work are supplied as standard items.

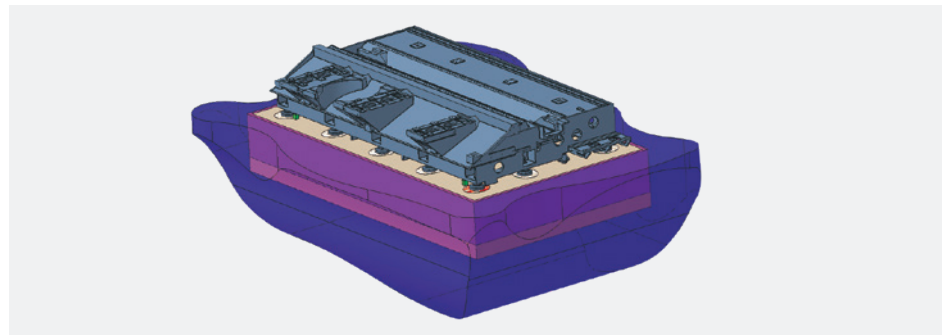

* Please consult with Doosan sales technicians regarding ground and operating conditions.



Spindle

A high-speed, high-rigidity built-in spindle is provided as a standard feature to enhance the productivity of machining large works as well as smaller parts.

Built-in Spindle Optimized for Cutting Molds

- Vibration and noise minimized with built-in spindle
- Long-nose spindle protrudes by 293 mm (11.5 inch), making it ideal for cutting deep pocket molds
- Dual contact spindle included as a standard feature for high rigidity and vibration

Advantaged with Deep pocket cutting

Long nose
293mm
(11.5 inch)

General → BM series


Max. spindle speed
12000r/min
30000r/min option

Spindle motor
30 / 25kW
(40.2 / 33.5 Hp)

Type	Speed	Spindle	Specifications
Built-in ISO #50	12000 r/min	Power (30 min/cont.)	30 / 25 kW (40.2 / 33.5 Hp)
		Max. torque	420 N·m (310.0 ft·lbs)

Dual Contact Spindle

Tool rigidity is enhanced by the firm clamping of the spindle. Tool lifecycle and cut-surface roughness have been improved as a result of the reduced vibration realized by the dual contact spindle.

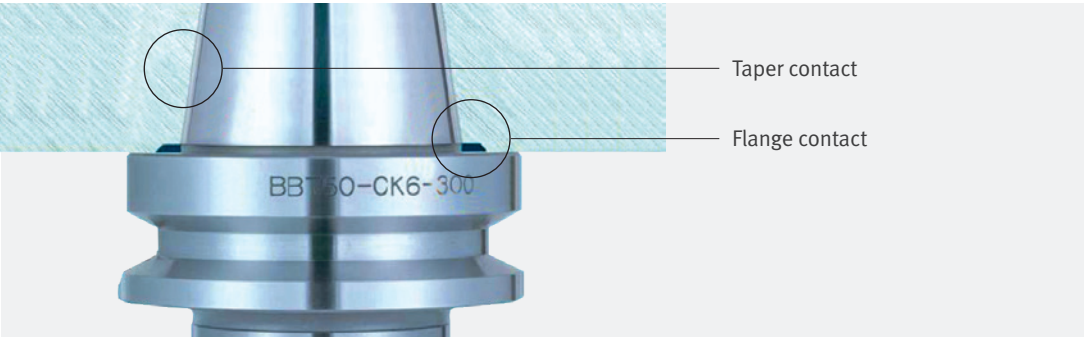

* Universal Head is available : Please contact DOOSAN to select detail specifications


Feed Axes

Equipped with roller LM Guideways for increased rigidity and a cooling system as a standard feature to minimize thermal displacement.


Stable and Fast Feed Shaft Structure

Roller-type LM Guideways deliver high rigidity to guarantee the outstanding accuracy of the linear feed system.

High-rigidity feed system structure

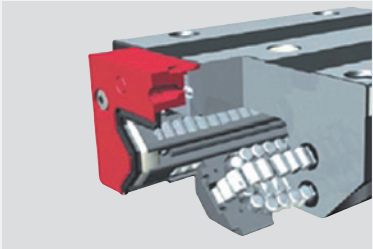


Roller guides



Rigid coupling

Ball screw nut cooling

Greatly reduced thermal displacement of feed shafts
Stable rigidity of the feed system

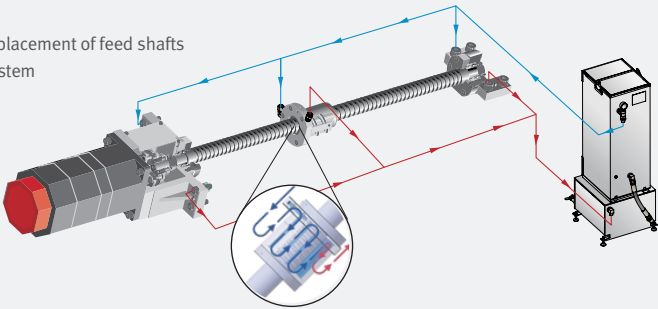


Linear scale – standard for all axes

All axes are equipped with the linear scale as a standard feature to maintain the highest degree of accuracy over many hours of operation.



Additional 200mm (7.9 inch) Y-axis for table self-cutting & extended cutting area.

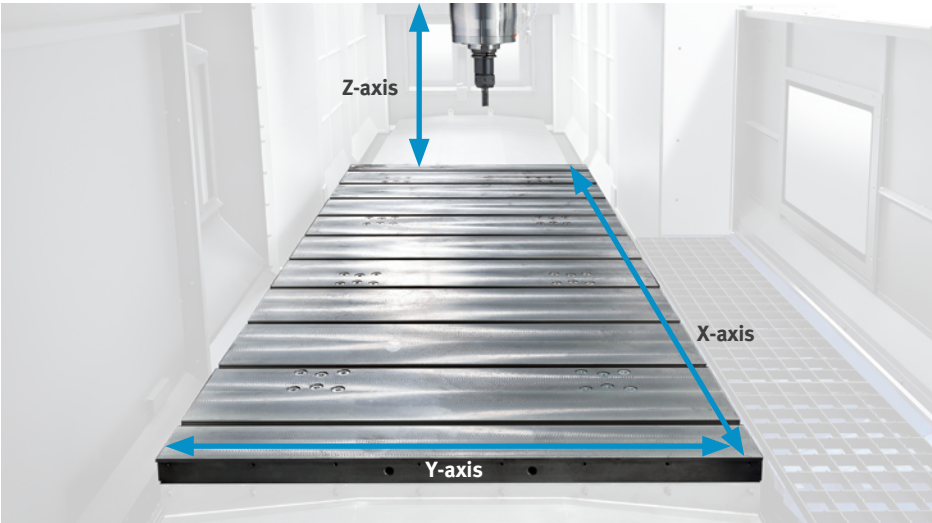


Description	Unit	BM 1530M	BM 2035M	BM2740M
Stroke (X / Y / Z)	mm (inch)	3000 / 1550 / 800 (118.1 / 61.0 / 31.5)	3500 / 2050 / 800 (137.8 / 80.7 / 31.5)	4000 / 2700 / 800 (157.5 / 106.3 / 31.5)
Rapid traverse (X / Y / Z)	m/min (ipm)	16 / 16 / 16 (629.9 / 629.9 / 629.9)	16 / 16 / 16 (629.9 / 629.9 / 629.9)	12 / 16 / 16 (472.4 / 629.9 / 629.9)



Magazine and Table


Tool Magazine

Enhanced productivity realized with the CAM-type tool changer (standard) for quicker tool changing.

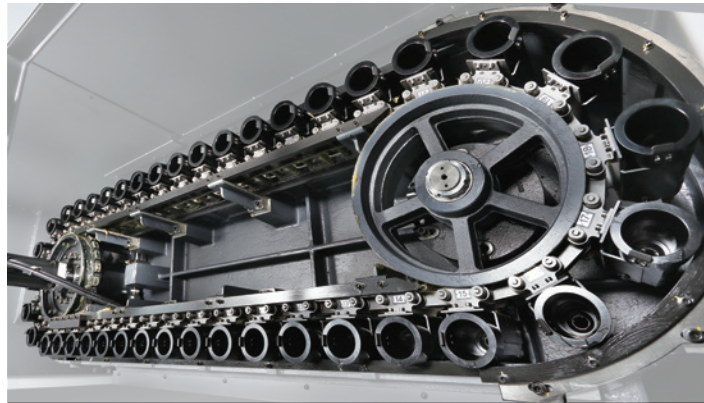

Description	Unit	BM Series	Max. tool diameter	mm (inch)	125 / 220 (4.9 / 8.7)
Tool storage capacity	ea	40 {60}	Max. tool length	mm (inch)	400 (15.7)
Tool-to-Tool	sec	3.0	Max. tool weight	kgf (lbs)	18 (8.8)

The table is fitted with 2 or 3 lanes of roller-type LM Guideways for highest machining stability.

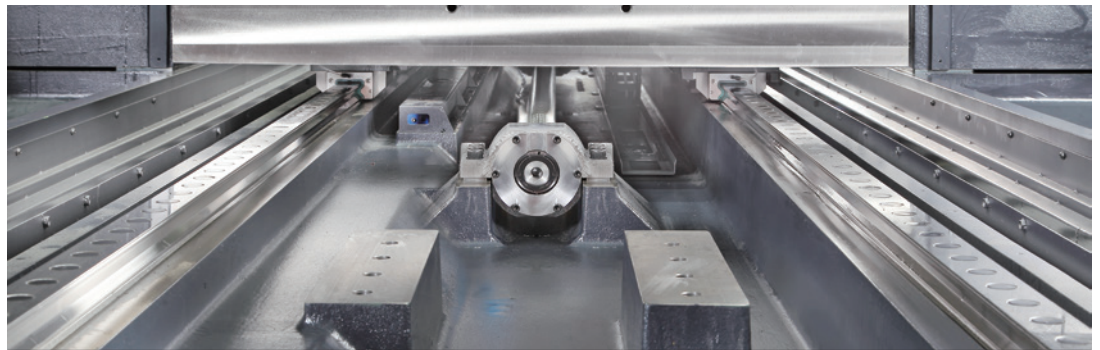

Description	Unit	BM1530M	BM 2035M	BM 2740M
Size (X x Y)	mm (inch)	3000 x 1350 (118.1 x 53.1)	3500 x 1850 (137.8 x 72.8)	4000 x 2500 (157.5 x 98.4)
Load capacity	kgf (lbs)	8000 (17637.0)	10000 (22046.2)	15000 (33069.3)



Cutting Performance

Machining Performance

Enhanced productivity realized with the CAM-type tool changer (standard) for quicker tool changing.

Cutting Process	Tool mm (inch)	Spindle Speed r/min	Feedrate mm/min (ipm)	Cutting Width mm (inch)	Cutting Depth mm (inch)	Cutting capability cm ³ /min (inch)
FACEMILL (SM45C)	D125 (D4.9)	500	2900 (114.2)	100 (3.9)	3.0 (0.1)	820 (50.0)
		500	1800 (70.9)	100 (3.9)	4.0 (0.2)	720 (43.9)
		500	1300 (51.2)	100 (3.9)	5.0 (0.2)	650 (39.7)
		500	1100 (43.3)	100 (3.9)	6.0 (0.2)	660 (40.3)
		400	720 (28.3)	100 (3.9)	7.0 (0.3)	504 (30.8)
Cutting Process	Tool mm (inch)	Cutting Width mm (inch)		Cutting Depth mm (inch)	Cutting capability cm ³ /min (inch)	
U-DRILL	D80 (D3.1)	500 (2.9)		100 (3.9)	40 (2.4)	
		600 (23.6)		100 (3.9)	40 (2.4)	
TAP	M42 x 4.5	113 (4.4)		508 (20.0)	50 (3.1)	

* The results, indicated in this catalogue are provides as example. They may not be obtained due to differences in cutting conditions and environmental conditions during measurement.

Product Overview

Basic Information

Basic Structure
Cutting
Performance

Detailed Information

Options
Optimized Tool
Processing Solution
Capacity Diagram
Specifications



Standard / Optional Specifications

Various options are available to satisfy the customers' requirements.

● Standard ○ Optional

NO.	Description	Features	BM Series
1	Spindle	12000 r/min, 30 / 25 kW (30min / Cont.)	●
2		FLOOD COOLANT PUMP_0.9 kW_0.45 MPA	●
3		FLOOD COOLANT PUMP_3.7 kW_2.0 MPA	○
4		THROUGH SPINDLE COOLANT_None	●
5		THROUGH SPINDLE COOLANT_1.5 kW_2.0 MPA	○
6		THROUGH SPINDLE COOLANT_3.7 kW_2.0 MPA	○
7	Travels	LINEAR SCALE (X, Y, Z-AXIS)	●
8		RAISING BLOCK 200 mm	○
9		RAISING BLOCK 300 mm	○
10	Magazine	MAGAZINE CAPACITY: 40 TOOLS	●
11		MAGAZINE CAPACITY: 60 TOOLS	○
12	Control System	FANUC 31I-B	●
13		DSQ1 (AICC II_200 BLOCKS)	●
14		DSQ2 (DSQ1 & DATA SERVER 1GB)	○
15		DSQ3 (DSQ2 & 600 BLOCKS)	○
16		DSQ4 (DSQ3 & 1000 BLOCKS)	○
17		EXTRA M CODE	○
18		FLASH MEMORY CARD	○
19	Others	SEMI SPLASH GUARD	●
20		FULL SPLASH GUARD	○
21		OIL SKIMMER	○
22		COOLANT GUN	●
23		CHIP CONVEYOR	○
24		AIR BLOWER	●
25		AIR GUN	○
26		AIR CONDITIONER	○
27		ELECTRIC CABINET LIGHT	○
28		WORK & TOOL COUNTER	○
29		1 MPG	●
30		3 MPG	○
31		LCD Display MPG	○
32		TRANSFORMER	○
33		3-STAGE SIGNAL TOWER	●
34		WORK LIGHT	●
35		Coolant level switch : Sensing level - Low **	○

* Please contact your Doosan Machine Tools representative for detailed machine information. ** Special Quotation.




Fire Safety Precautions

There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting the controlled and careful use of coolants and modifying the machine without the consent of the manufacturer. Always check the SAFETY GUIDELINES carefully before using the machine.

Optional Devices

Various solutions are available for better machining performance and higher-quality.

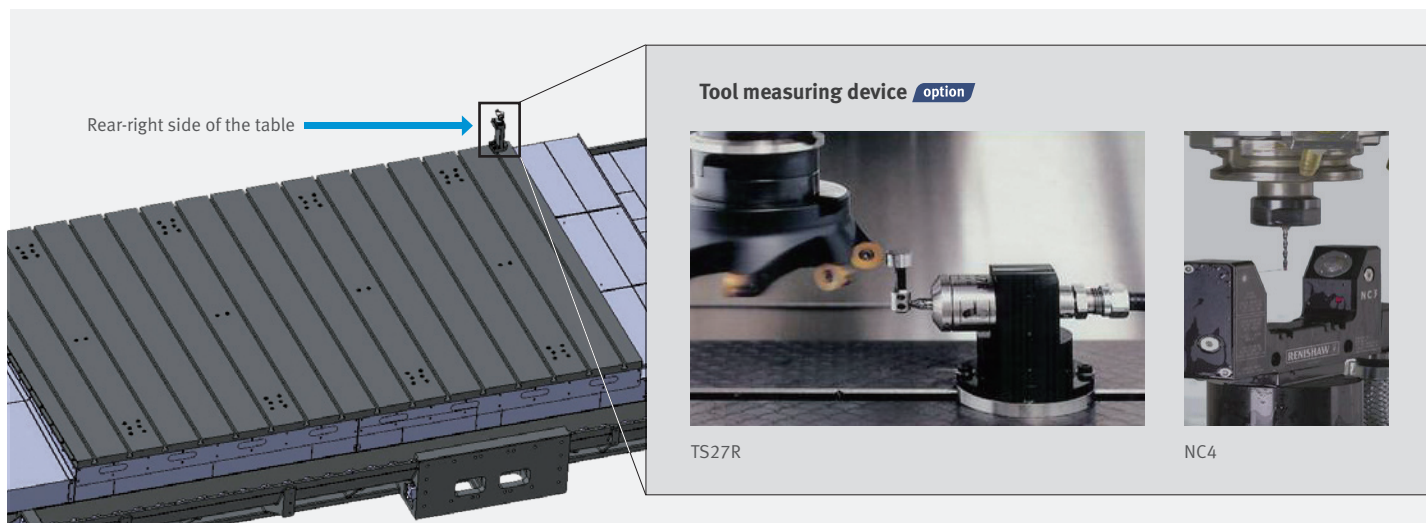

MPG MPG suitable for large works



Manual handle Portable MPG



Manual handle Portable 3 MPG
option



Manual handle MPG with LCD
option



Manual operation panel option
HMOP
(Handy Machine Operator's Panel)

3-Stage Signal Tower



- Warning lamp**
Reports abnormal operational conditions of the machine
- Work completion indicator**
Indicates that the work has been completed
- In-progress lamp**
Indicates that the work is being carried out

Linear scale



Power saving function

This function saves electricity when the machine is not in use.

Swing arm MAC (Manual Attachment Change)




Optimized Tool Processing Solution

Superior surface finishes and machining accuracy are achieved through using standard processing solutions such as high-speed / high-precision contour control and thermal displacement compensation.

DSQ High Speed / High Precision Contour Control

* DSQ : Doosan Super Quality


- **DSQ1**
(AICC2 _ 200 Block + Machining condition selection function)
- **DSQ2 option**
(DSQ1 + Data server [1GB])
- **DSQ3 option**
(DSQ2 + High speed processing _ 600 Block)
- **DSQ4 option**
(DSQ3 + High speed processing_1000 block)

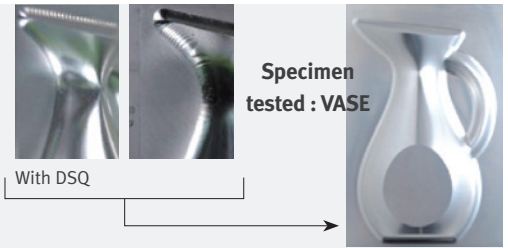

DAFC The Optimal Feed Control option

* DAFC : Doosan Adaptive Feedrate Control


Optimal feed control is ensured by real-time spindle load detection.

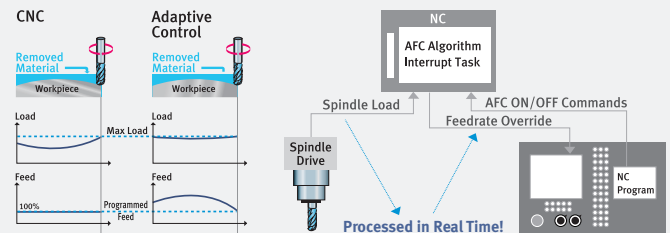


DTMM Tool Load Monitoring System (DTMM*) option

* DTMM : Doosan Tool load Monitoring for Machining Centers

The technology of protecting tool and machine in abnormal load during the cutting process

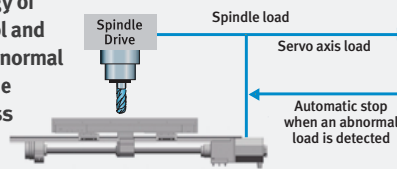

DTMM* software



- ✓ Detection cycle = Program interpolation cycle
- ✓ Automatic stop when an abnormal load is detected
- ✓ Select an alternative tool and command to NC

DSTC Smart thermal displacement multi compensation technology

* DSTC : Doosan Smart Thermal Control


Realizes high-quality, high-precision machining with smoothing thermal displacement compensation of the spindle and structure.

Compensation of static displacement of spindle

Compensates changes in tool position caused by expansion of the spindle shaft at high speed.

Structure thermal displacement compensation

Compensates irregular deflection or expansion of the structure due to ambient temperature using a multiple temperature sensors.




Compensation of structure thermal displacement


Thermal error of the spindle caused by heat accumulation is compensated with 5 algorithms including a smoothing function.




Without smoothing



With smoothing

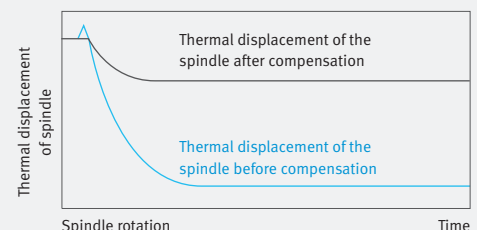


These Doosan software packages have been customized to provide fast and easy setup of tooling, workpiece, and program. These functions minimize the idle time caused by process setup and maximize the machine's productivity.

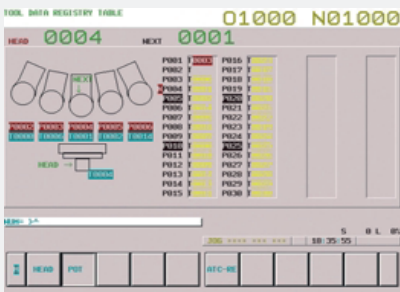


Tool Data Registry Table

Displays the information on the tools in the pot in 2D graphics.

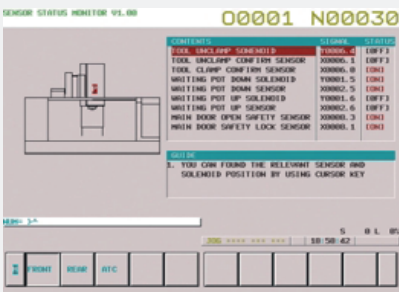


Sensor Status Monitor

Shows solenoid valve and sensor status without the electric diagram.

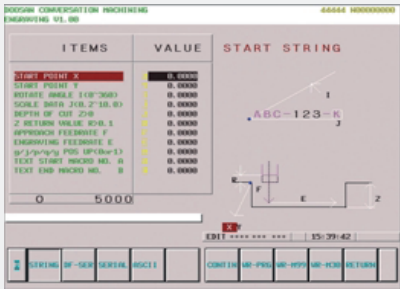


Engraving option

Allows character engraving on the workpiece.

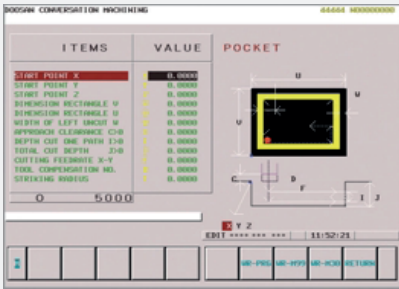

Pattern Cycle

Pattern cycle programs can be created using an interactive way of parameter input.

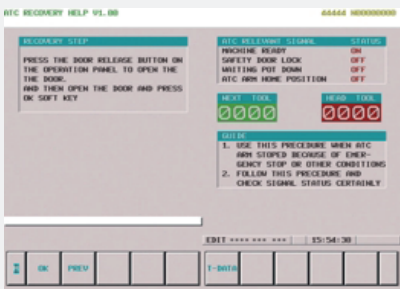

ATC Recovery Help

When ATC is stopped (malfunction or emergency), this function guides the operator to recover the machine back to its normal state.




Tool Load Monitor option

Detects tool damage and wear by setting limits on the load for spindle and axis to minimize mechanical damages.



Renishaw Gui (Tool measure)
(Work measure option)

Enables automatic measurement of tool length, tool diameter, and work coordinates, and detects tool damage using an interactive method.

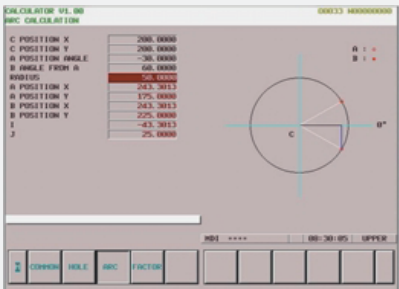

Calculator


Provides all functions of a general calculator plus automatic calculation of cutting size and conditions.

External Dimensions / Table


External Dimensions

Unit: mm (inch)

Top View

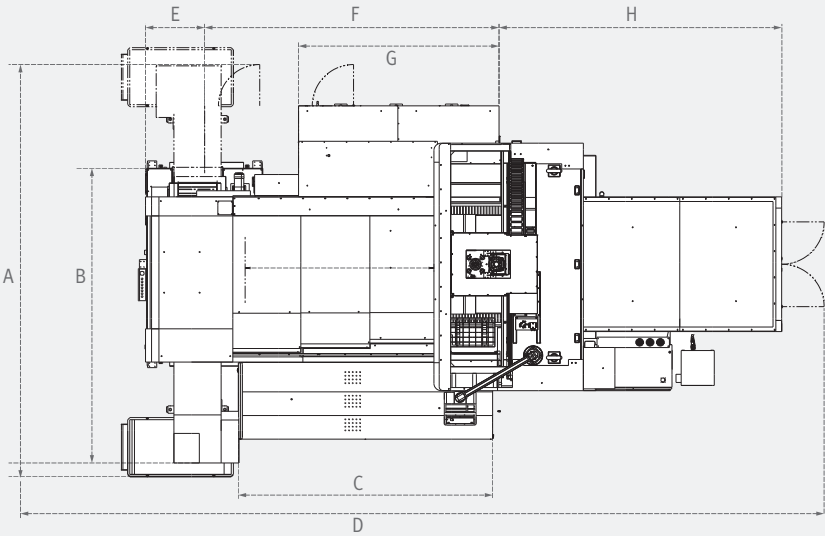

Front View

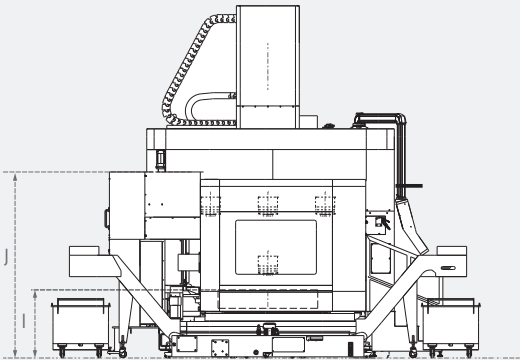

* Please comply with our company's installation guideline, such as ground condition and anchoring, in order to achieve the maximum precision and performance of the machine.


Model	A	B	C	D	E	F	G	H	I	J
BM 1530M	5543 (218.2)	4282 (168.6)	2768 (109.0)	10944 (430.9)	677 (26.7)	3985 (156.9)	2715 (106.9)	3826 (150.6)	2520 (99.2)	923 (36.3)
BM 2035M	5943 (234.0)	4682 (184.3)	3000 (118.1)	11963 (471.0)	1036 (40.8)	3985 (156.9)	2715 (106.9)	4246 (167.2)	2520 (99.2)	923 (36.3)
BM 2740M	6636 (261.3)	5042 (198.5)	3500 (137.8)	13459 (529.9)	1772 (69.8)	3983 (156.8)	2712 (106.8)	4733 (186.3)	2550 (100.4)	953 (37.5)

* Some peripheral equipment can be placed in other places


** Providing anchoring bolts. Foundation work must be done.

Table

Unit: mm (inch)

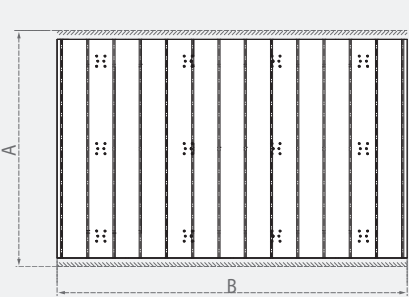

* T-slot direction can be changed



Model	A	B	C	T-SLOT distance	Quantity
BM 1530M	1350 (53.1)	3000 (118.1)	210 (8.3)	300	10 ea
BM 2035M	1850 (72.8)	3500 (137.8)	210 (8.3)	300	11 ea
BM 2740M	2500 (98.4)	4000 (157.5)	210 (8.3)	300	14 ea

Basic Information

- Basic Structure
- Cutting
- Performance

Detailed Information

- Options
- Optimized Tool
- Processing Solution
- Capacity Diagram
- Specifications

Machine Specifications



Description		Unit	BM 1530M	BM 2035M	BM2740M
Travel	X-axis	mm (inch)	3000 (118.1)	3500 (137.8)	4000 (157.5)
	Y-axis	mm (inch)	1550 (61.0)	2050 (80.7)	2700 (106.3)
	Z-axis	mm (inch)	800 (31.5)	800 (31.5)	800 (31.5)
Table	Spindle to table surface	mm (inch)	200~1000 (7.9~39.4)		150~950 (5.9~37.4)
	Distance between columns	mm (inch)	1700 (66.9)	2200 (86.6)	2700 (106.3)
	Table size	mm (inch)	3000 x 1350 (118.1 x 53.1)	3500 x 1850 (137.8 x 72.8)	4000 x 2500 (157.5 x 98.4)
	Loading capacity	kg (lb)	8000 (17636.7)	10000 (22045.9)	15000 (33068.9)
	Table surface	-	T-SLOT (10-300 x 24H8)	T-SLOT (11-300 x 24H8)	
Spindle	Speed	r/min	12000 {30000}*		
	Taper	-	ISO #50, 7/24		
	Max. torque	N·m (ft·lb)	420 (310.0)		
	Spindle power	kW (Hp)	30 / 25 (40.3 / 33.6) [30min / Cont.]		
Feed rate	Rapid feedrate (X / Y / Z)	m/min (ipm)	16 / 16 / 16 (629.9 / 629.9 / 629.9)		12 / 16 / 16 (472.4 / 629.9 / 629.9)
	Cutting feedrate	mm/min (ipm)	8000 (315.0)		6000 (236.2)
ATC	Tool shank type	-	BT / CAT / DIN 50		
	Tool storage capacity	ea	40 {60}*		
	Max. tool diameter [w/o adjacent tool]	mm (inch)	125 [220] (4.9 [8.7])		
	Max. tool length	mm (inch)	400 (15.7)		
	Max. tool weight	kg (lb)	20 (44.1)		
	Max. tool moment	N·m (ft·lb)	12.74 (9.4)		
	Tool selection type	-	MEMORY RANDOM		
	Tool change time (T-T-T)	s	3.0		
Machine Size	Height	mm (inch)	4770 (187.8)	4770 (187.8)	4675 (184.1)
	Dimension (L x W)	mm (inch)	8690 x 4450 (342.1 x 175.2)	9540 x 4960 (375.6 x 195.3)	10825 x 5535 (426.2 x 217.9)
	Weight	kg (lb)	29000 (63933.1)	35500 (78262.9)	48000 (105820.3)

NC Unit Specifications

● Standard ○ Optional X N/A

FANUC

No.	Item	Spec.	Fanuc 31i
1	Axes Control	Additional controlled axes	5 axes in total ○
2		Least command increment	0.001 mm / 0.0001" ●
3		Least input increment	0.001 mm / 0.0001" ●
4		Interpolation type pitch error compensation	○
5	Interpolation & Feed Function	2nd reference point return	G30 ●
6		3rd / 4th reference return	○
7		Inverse time feed	○
8		Cylindrical interpolation	G07.1 ○
9		Helical interpolation B	Only Fanuc 30i X
10		Smooth interpolation	○
11		NURBS interpolation	○
12		Involute interpolation	○
13		Helical involute interpolation	○
14		Bell-type acceleration / deceleration before look ahead interpolation	○
15		Smooth backlash compensation	●
16		Automatic corner override	G62 ○
17		Manual handle feed rate	x1, x10, x100 (per pulse) ●
18		Handle interruption	●
19		Manual handle retrace	○
20		Nano smoothing	AI contour control II is required. ○
21	Spindle & M-code Function	AICC II	200 BLOCK ●
22		AICC II	400 BLOCK ○
23		High-speed processing	600 BLOCK X
24		DSQ I	AICC II (200block) + Machining condition selection function ●
25		DSQ II	AICC II (200block) + Machining condition selection function + Data server(1GB) ○
26		DSQ III	AICC II with high speed processing (600block) + Machining condition selection function + Data server (1GB) ○
27		DSQ IV	AICC II with high speed processing (1000block) + Machining condition selection function + Data server (1GB) ○
28		M- code function	●
29	Tool Function	Retraction for rigid tapping	●
30		Rigid tapping	G84, G74 ●
31		Number of tool offsets	64 ea ●
32		Number of tool offsets	99 / 200 / 400 / 499 / 999 / 2000 ea ○
33		Tool nose radius compensation	G40, G41, G42 ●
34		Tool length compensation	G43, G44, G49 ●
35		Tool life management	●
36		Addition of tool pairs for tool life management	○
37	Programming & Editing Function	Tool offset	G45 - G48 ○
38		Custom macro	●
39		Macro executor	●
40		Part program storage	256KB (640m) ●
41		Part program storage	512KB (1,280m) / 1MB (2,560m) / 2MB (5,120m) / 4MB (1,0240m), 8MB (2,0480m) ○
42		Inch/metric conversion	G20 / G21 ●
43		Number of Registered programs	500 ea ●
44		Number of Registered programs	1000 / 4000 ea ○
45		Optional block skip	9 BLOCK ○
46		Playback function	○
47		Addition of workpiece coordinate system	G54.1 P1 - 48 (48 pairs) 48 pairs
48		Addition of workpiece coordinate system	G54.1 P1 - 300 (300 pairs) ○
49		Tilted working plane indexing command	G68.2 ○
50		Tilted working plane indexing function	Programming TWP command on guidance window X
51	OTHERS FUNCTIONS (Operation, setting & Display, etc)	Embedded Ethernet	●
52		USB memory interface	Only Data Read & Write ●
53		High speed skip function	○
54		Polar coordinate command	G15 / G16 ○
55		Polar coordinate interpolation	G12.1 / G13.1 ○
56		Programmable mirror image	G50.1 / G51.1 ○
57		Scaling	G50, G51 ○
58		Single direction positioning	G60 ○
59		Pattern data input	○
60		Jerk control	AI contour control II is required. ○
61		Fast Data server with 1GB PCMCIA card	○
62		Fast Ethernet	○
63		3-dimensional coordinate conversion	○
64		3-dimensional tool compensation	○
65		Figure copying	G72.1, G72.2 ○
66		Machining time stamp function	○
67		Machine alarm diagnosis	X
68		CNC screen display	●
69		CNC screen dual display function	●
70		One touch macro call	○
71		EZ Guide i (Conversational Programming Solution)	○
72		Dynamic graphic display	- Machining profile drawing. - When the EZ Guide i is used, the Dynamic graphic display cannot application ○



doosanmachinetools.com

Head Office

22F T Tower, 30, Sowol-ro 2-gil
Jung-gu, Seoul, Korea, 04637
Tel: +82-2-6972-0370/0350
Fax: +82-2-6972-0400

Doosan Machine Tools America

19A Chapin Road, Pine Brook
New Jersey 07058, United States
Tel: +1-973-618-2500
Fax: +1-973-618-2501

Doosan Machine Tools Europe

Emdener Strasse 24, D-41540
Dormagen, Germany
Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

Doosan Machine Tools India

No.82, Jakkur Village
Yelahanka Hobli, Bangalore-560064
Tel: + 91-80-2205-6900
E-mail: india@doosanmt.com

Doosan Machine Tools China

Room 101,201,301, Building 39 Xinzhuang
Highway No.258 Songjiang District
China Shanghai (201612)
Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

Sales inquiry

sales@doosanmt.com

*For more details, please contact Doosan Machine Tools.

*Specifications and information contained within this catalogue may be changed without prior notice.

*Doosan Machine Tools Co., Ltd. is a subsidiary of MBK Partners. The trademark **DOOSAN** is used under a licensing agreement with Doosan Corporation, the registered trademark holder.

ver. EN 211224 SU